


CHART A		
42WA	49WA	60WA
35/440	40/440	45/440

Immersion
Crankcase
Heater

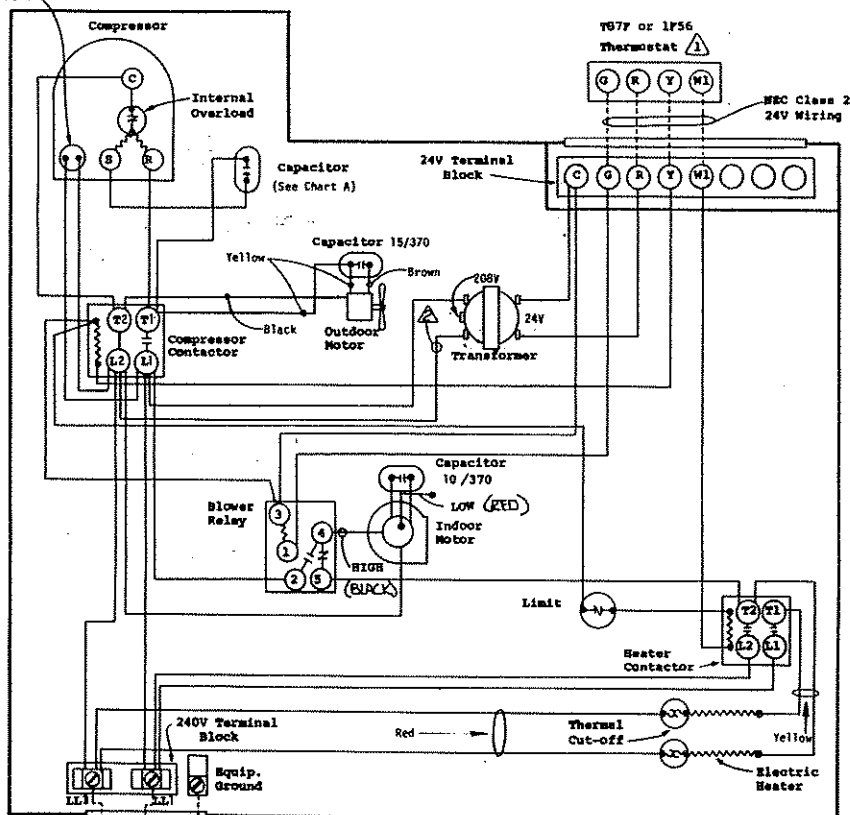

Fused
Disconnect
Switch

230/208-60-1

USE COPPER OR
ALUMINUM WIRE

- ⚠ Set heat anticipator at .40A.
- ⚠ For 208V operation move this wire to 208V transformer tap.

Factory Wiring _____
Field Wiring - - - - -

4010-130P