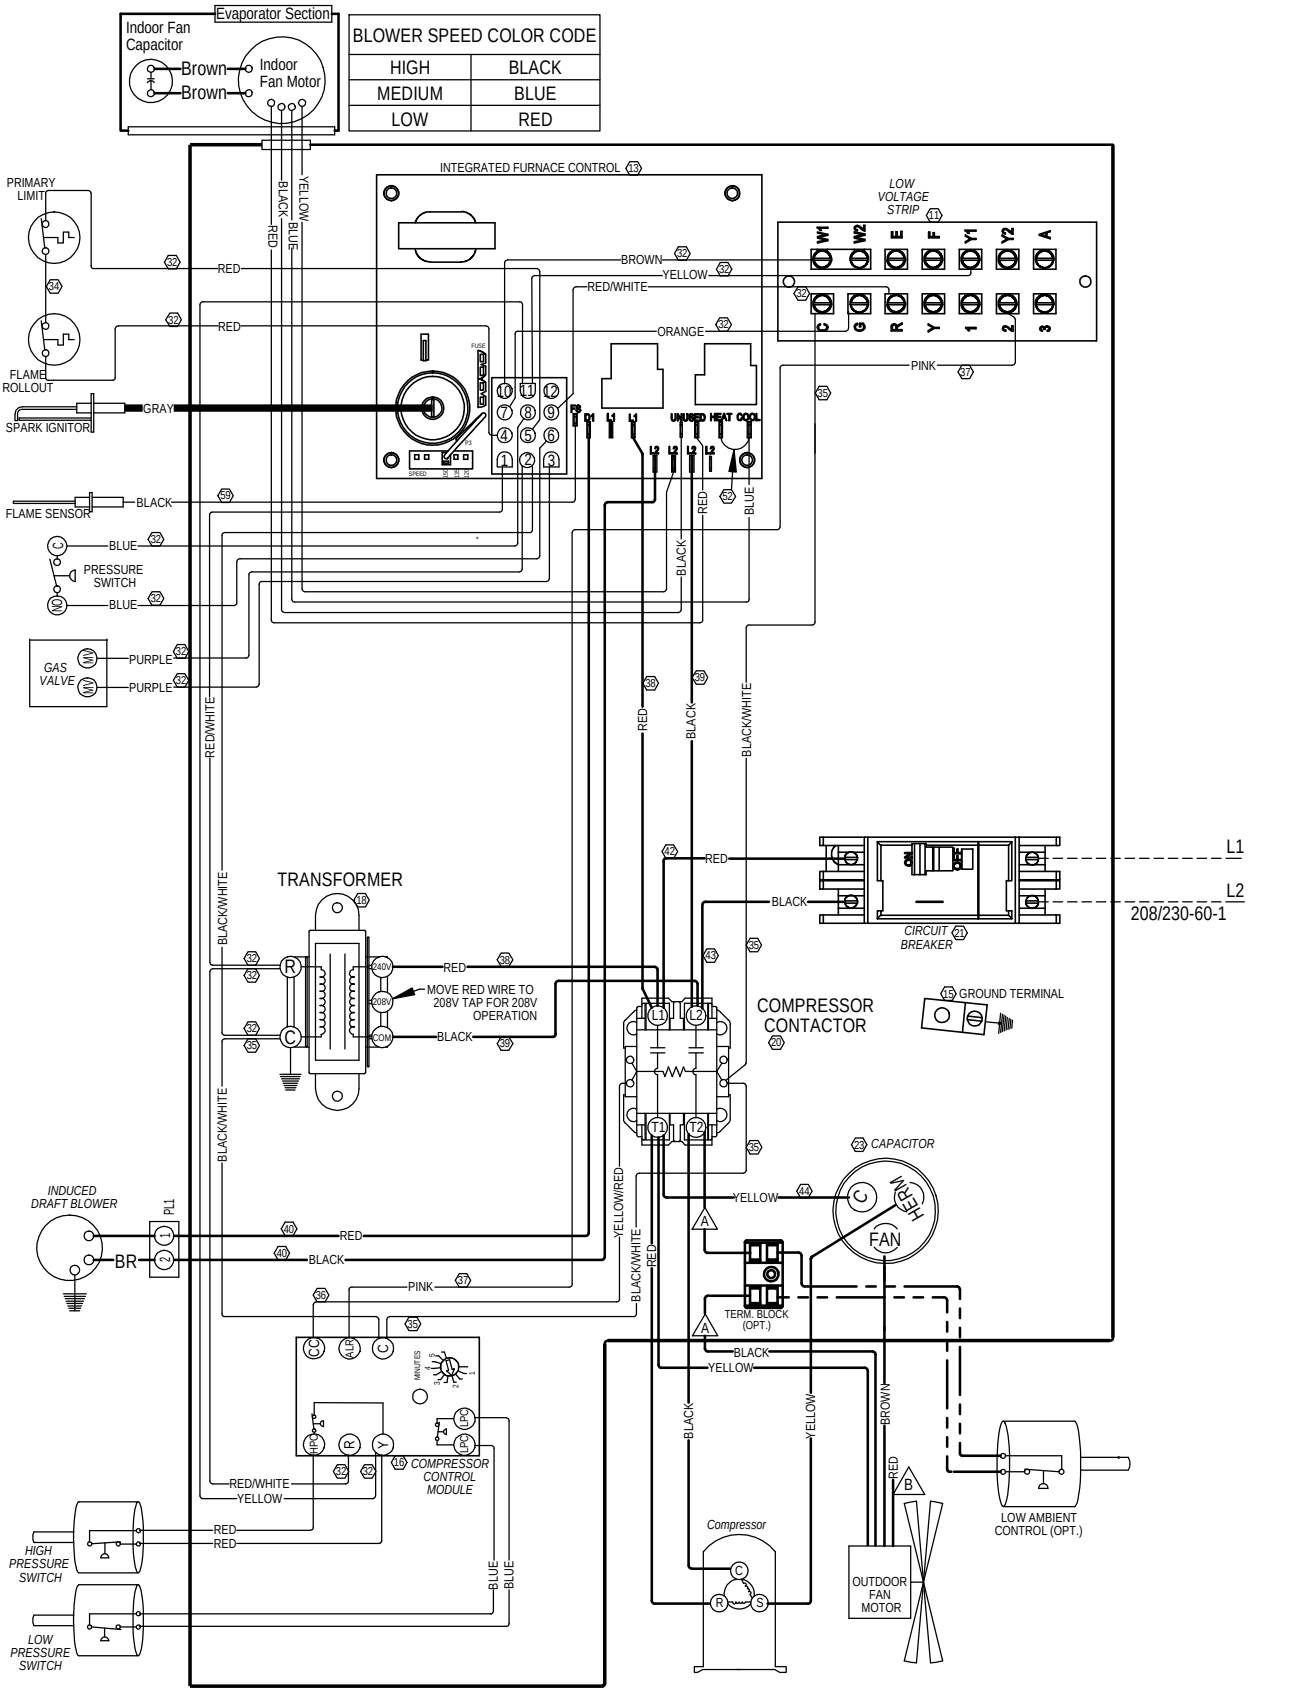


| Model | C. Breaker | Capacitor |
|---|---|---|
| W30G2-A | 30A | 45+5/370 |
| W36G2-A | 35A | 45+5/370 |
| W42G2-A | 50A | 45+10/370 |
| W48G2-A | 50A | 70+10/370 |

USE COPPER CONDUCTORS SUITABLE FOR AT LEAST 75° C

IF ANY ORIGINAL WIRE AS SUPPLIED WITH THE APPLIANCE MUST BE REPLACED, IT MUST BE REPLACED WITH WIRING MATERIAL HAVING A TEMPERATURE RATING OF AT LEAST 105° C EXCEPT THE IGNITION CABLE WHICH IS 250°C HIGH VOLTAGE CABLE

99 Wire Identification numbers for Bard use only.

| | Factory | Field | Optional |
|---|---|---|---|
| High Voltage | | | |
| Low Voltage | | | |

A WIRES CONNECT IF OPTION NOT USED

B WIRE NOT APPLICABLE TO ALL MODELS

Bard Mfg. Co. Bryan, Ohio

4085-161 A