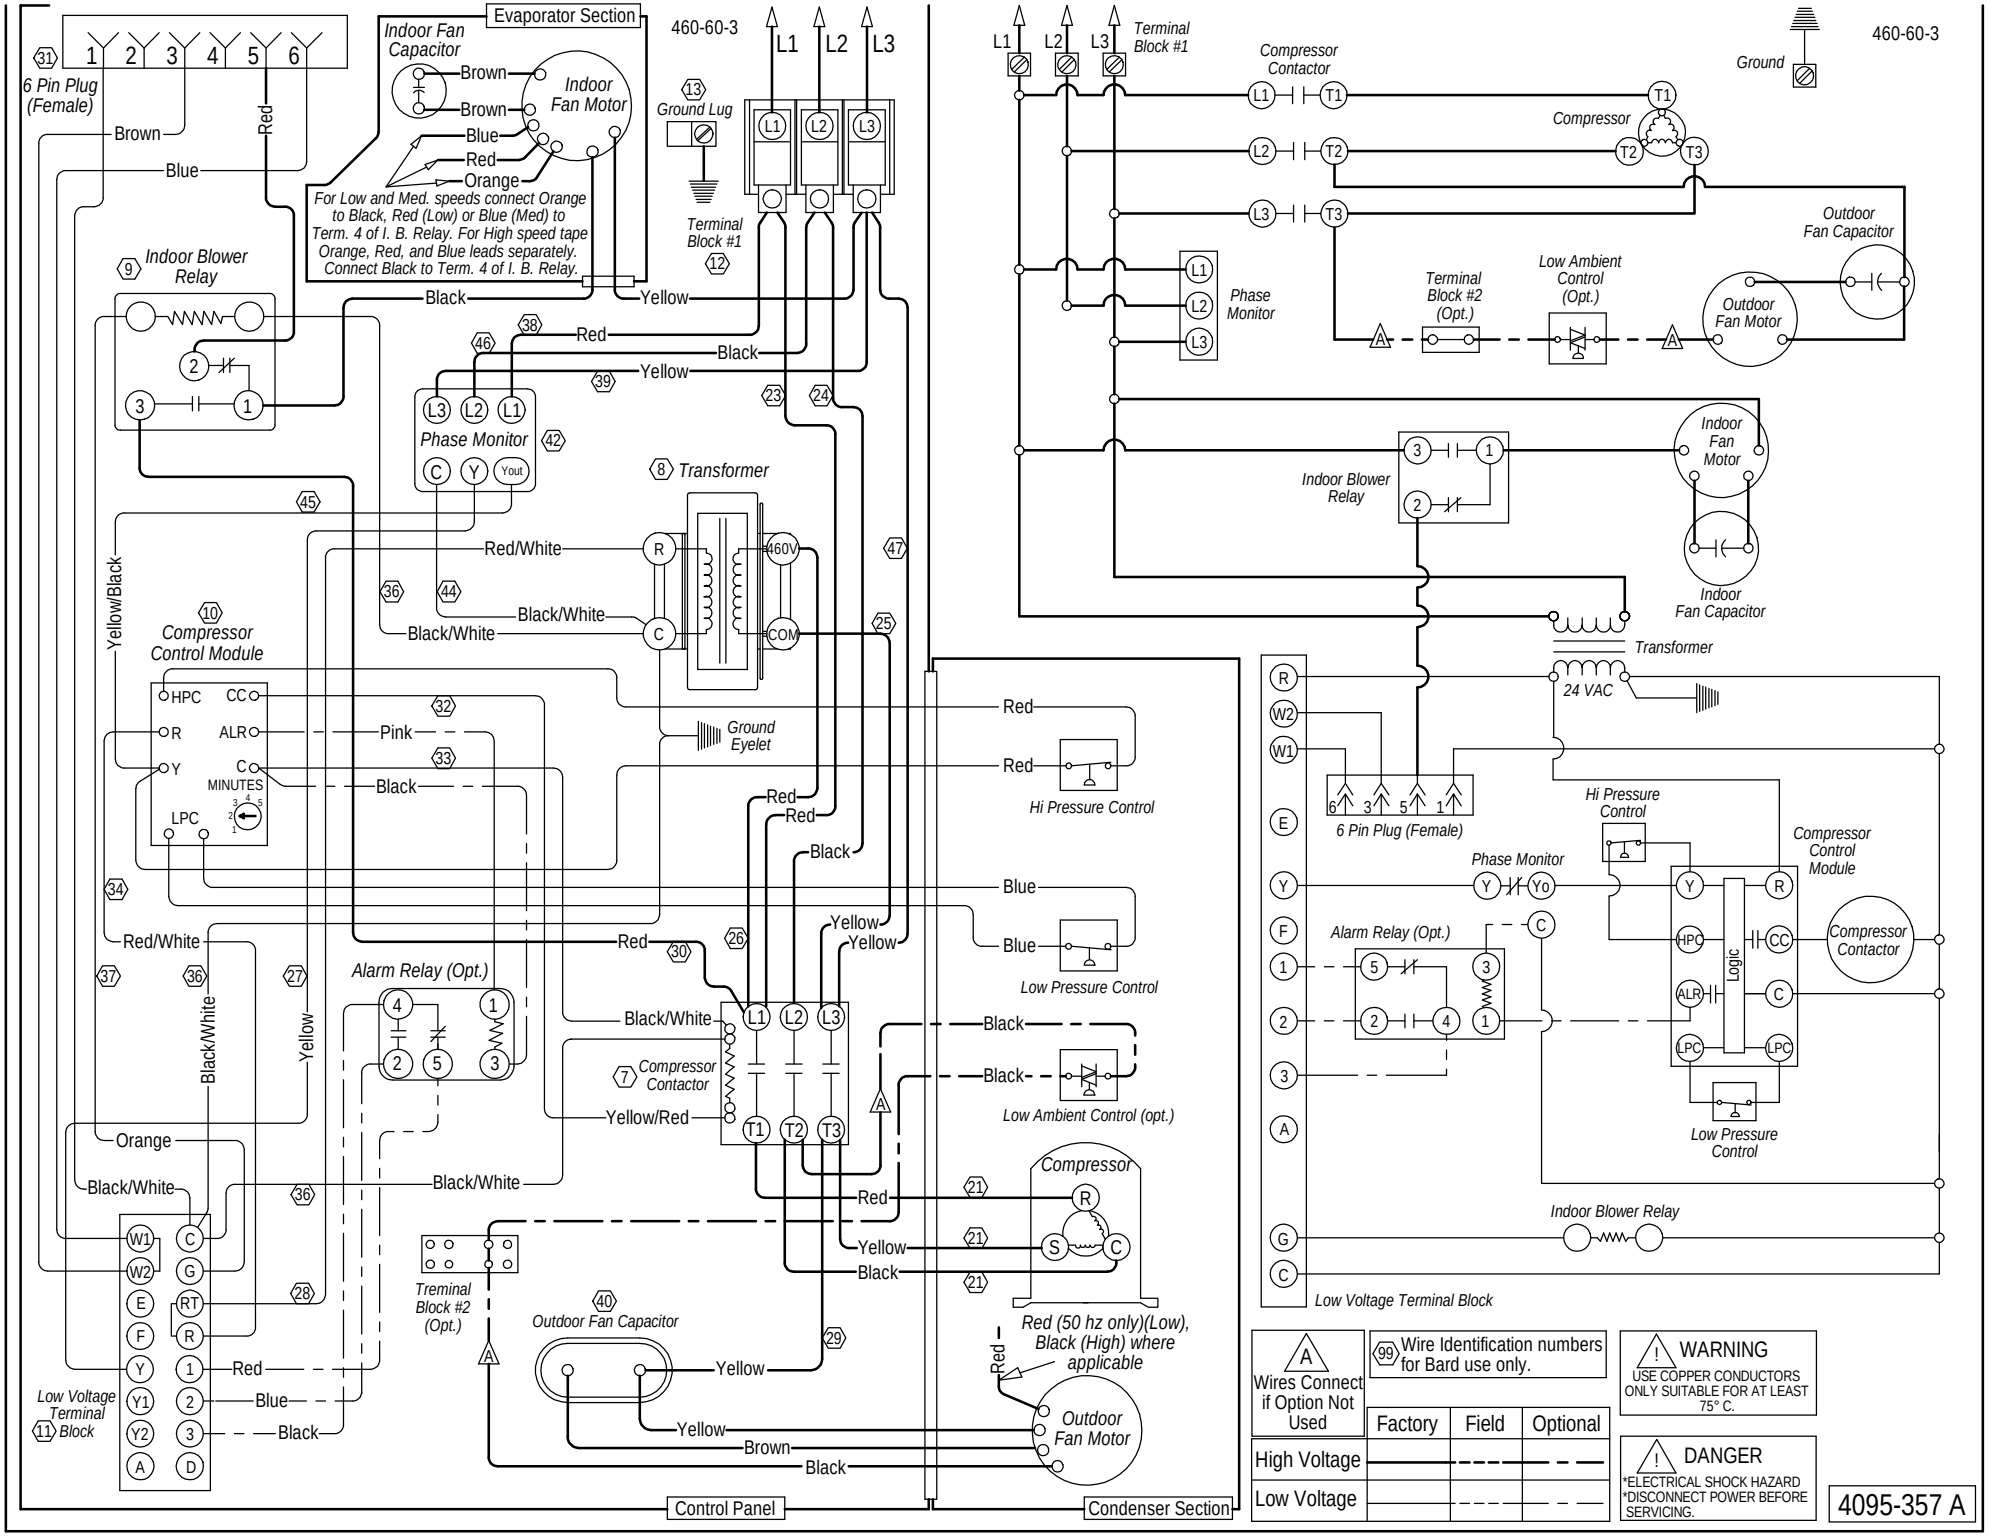
Evaporator Section
460-60-3
6 Pin Plug (Female)
Indoor Fan Capacitor
Indoor Fan Motor
Ground Lug
Terminal Block #1
For Low and Med. speeds connect Orange to Black, Red (Low) or Blue (Med) to Term. 4 of I. B. Relay. For High speed tape Orange, Red, and Blue leads separately. Connect Black to Term. 4 of I. B. Relay.
Indoor Blower Relay
Phase Monitor
Transformer
460V
COM
Compressor Control Module
HPC
CC
R
ALR
Y
C
MINUTES
LPC
Ground Eyelet
Hi Pressure Control
Low Pressure Control
Low Ambient Control (opt.)
Alarm Relay (Opt.)
Compressor Contactor
Compressor
Treminal Block #2 (Opt.)
Outdoor Fan Capacitor
Outdoor Fan Motor
Red (50 hz only)(Low), Black (High) where applicable
Low Voltage Terminal Block
Control Panel
Condenser Section
Terminal Block #1
Compressor Contactor
Compressor
Ground
460-60-3
Outdoor Fan Capacitor
Outdoor Fan Motor
Low Ambient Control (Opt.)
Terminal Block #2 (Opt.)
Phase Monitor
Indoor Blower Relay
Indoor Fan Motor
Indoor Fan Capacitor
Transformer
24 VAC
6 Pin Plug (Female)
Hi Pressure Control
Phase Monitor
Compressor Control Module
Alarm Relay (Opt.)
Logic
Compressor Contactor
Low Pressure Control
Indoor Blower Relay
Low Voltage Terminal Block
Wires Connect if Option Not Used
Wire Identification numbers for Bard use only.
Factory
Field
Optional
High Voltage
Low Voltage
WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.
DANGER
*ELECTRICAL SHOCK HAZARD
*DISCONNECT POWER BEFORE SERVICING.
4095-357 A