


For Vent Wiring or controller/thermostat connections, see literature packet or go to www.bardhvac.com

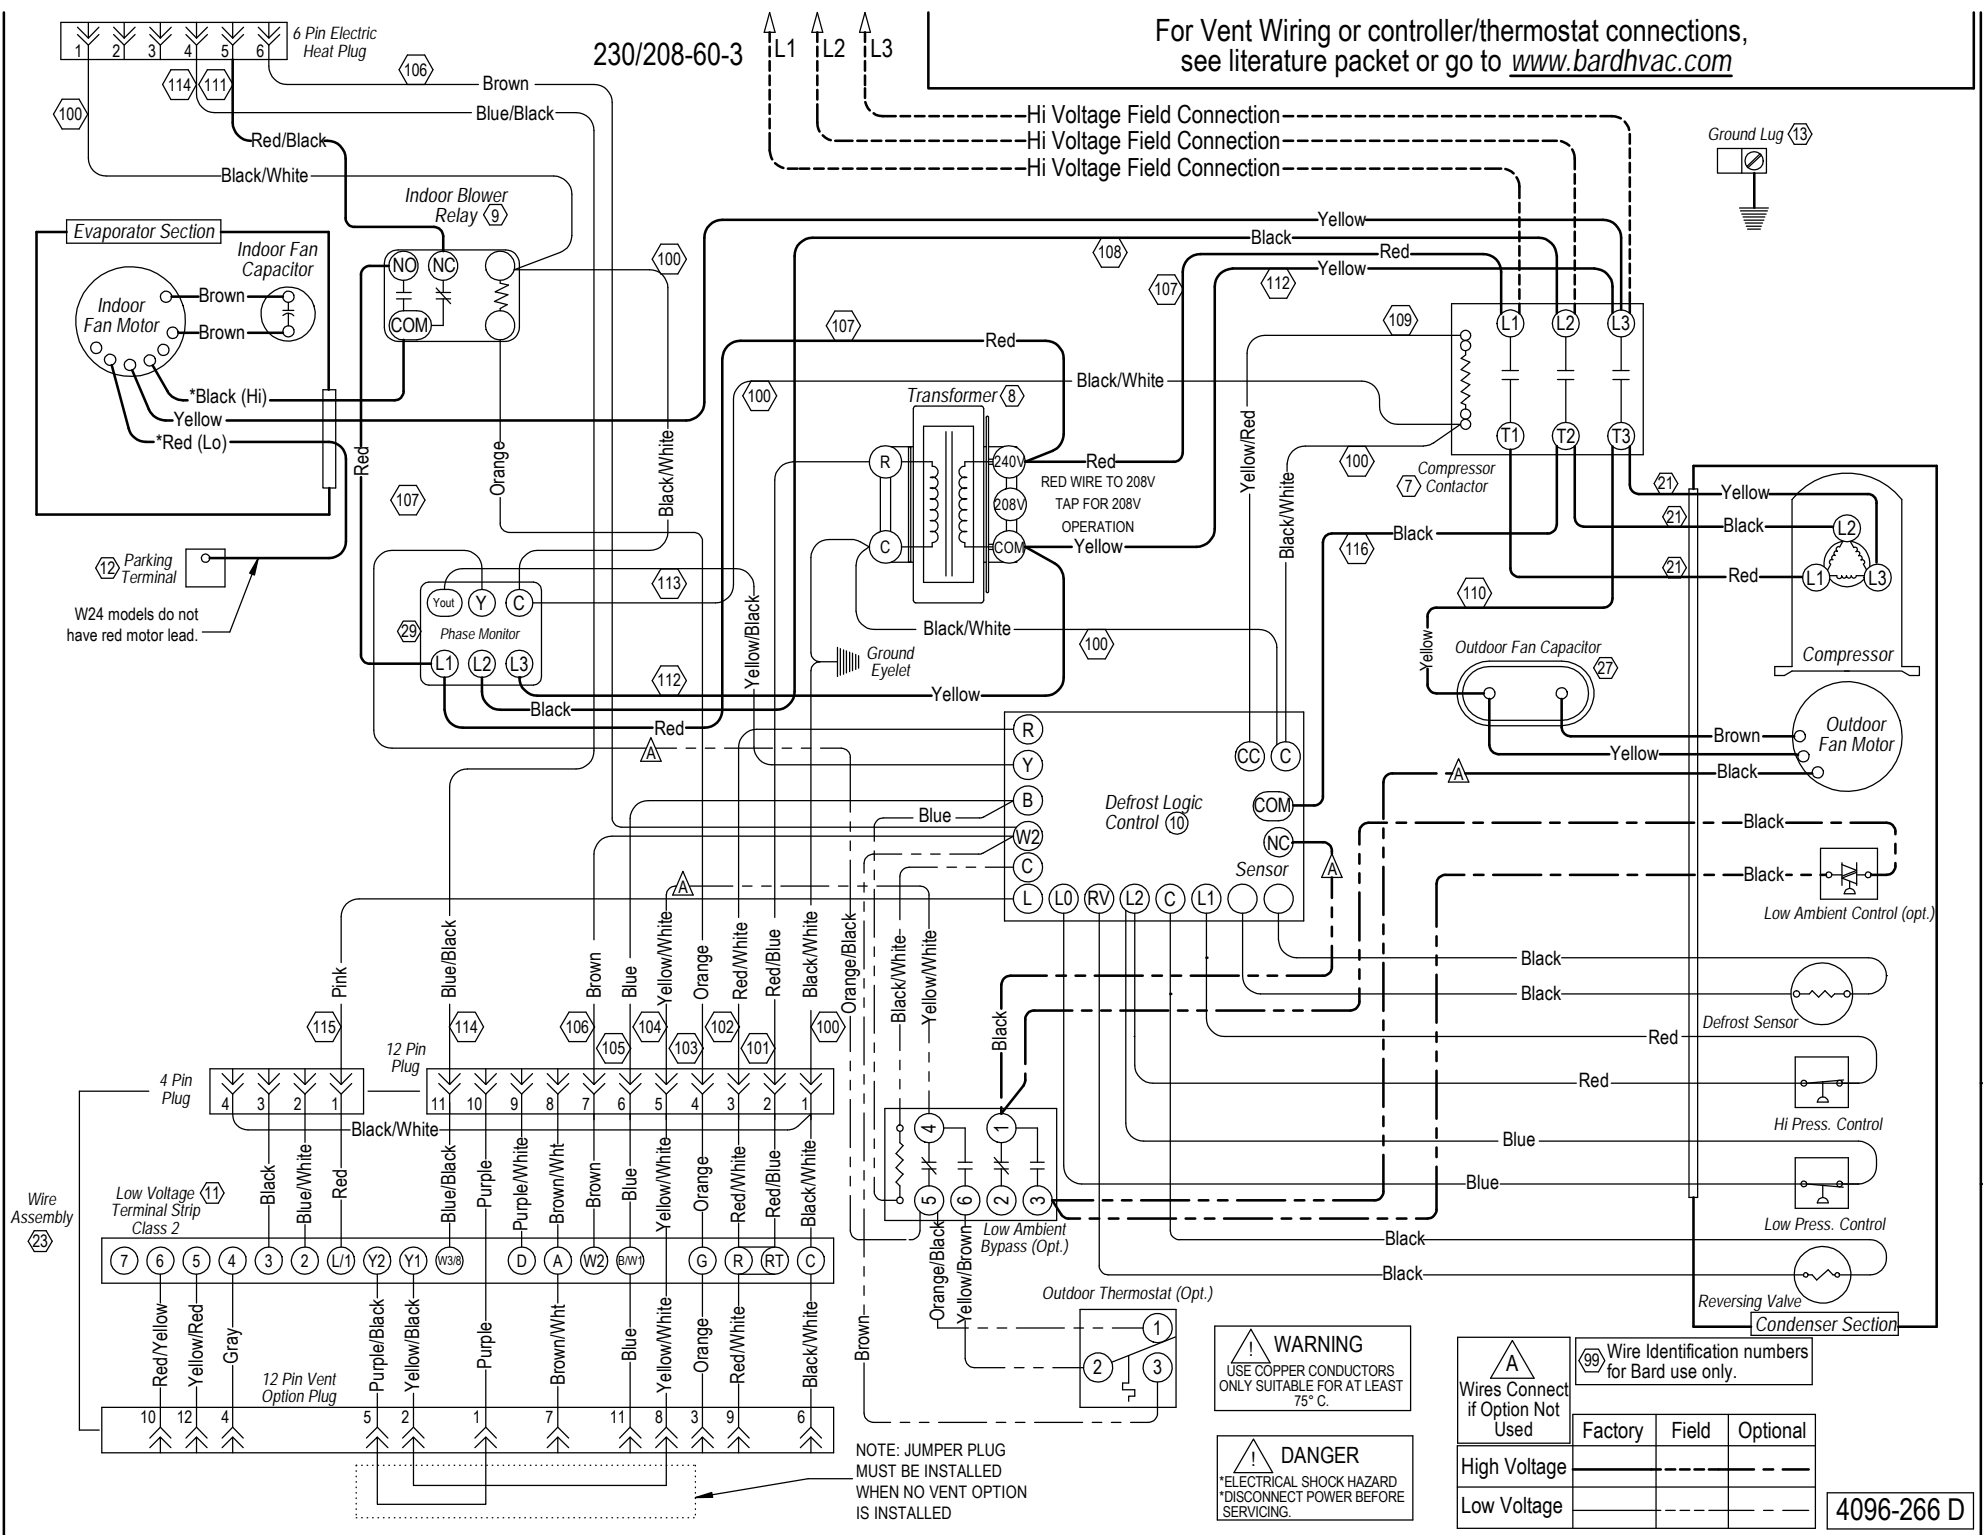

230/208-60-3

L1 L2 L3

6 Pin Electric Heat Plug

Indoor Blower Relay (9)

Evaporator Section

Indoor Fan Capacitor

Indoor Fan Motor

Transformer (8)

Compressor Contactor (7)

Outdoor Fan Capacitor (27)

Outdoor Fan Motor

Defrost Logic Control (10)

Low Ambient Control (opt.)

Defrost Sensor

Hi Press. Control

Low Press. Control

Reversing Valve

Condenser Section

W24 models do not have red motor lead.

NOTE: JUMPER PLUG MUST BE INSTALLED WHEN NO VENT OPTION IS INSTALLED

WARNING
USE COPPER CONDUCTORS ONLY SUITABLE FOR AT LEAST 75° C.

DANGER
ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING.

A
Wires Connect if Option Not Used

99 Wire Identification numbers for Bard use only.

	Factory	Field	Optional
High Voltage			
Low Voltage			

4096-266 D