



THE WALL-MOUNT™ AIR CONDITIONERS (50HZ)

Models W24A to W70A Right Side Control Panel
Models W24L to W70L Left Side Control Panel
21,600 Btuh (6.33 KW) – 62,000 Btuh (18.16 KW)

**FOR EXPORT
USE ONLY**

The Bard Wall-Mount Air Conditioner is a self contained energy efficient system, which is designed to offer maximum indoor comfort at a minimal cost without using valuable indoor floor space or outside ground space. This unit is the ideal product for versatile applications such as: new construction, modular offices, school modernization, telecommunication structures, portable structures or correctional facilities. Factory or field installed accessories are available to meet specific job requirements.

Engineered Features

Aluminum Finned Copper Coils:

Grooved tubing and enhanced louvered fin for maximum heat transfer and energy efficiency.

Twin Blowers:

Move air quietly. Most models feature multispeed blower motors providing airflow adjustment for high and low static operation. Motor overload protection is standard on all models.

Air Conditioner Compressor:

Scroll Compressors eliminate need for crankcase heater. Standard on all models.

R-410A Refrigerant:

Designed with R-410A (HFC) non-ozone depleting refrigerant in compliance with the Montreal protocol and 2010 EPA requirements.

Phase Rotation Monitor:

Standard on all 3 phase scroll compressors. Protects against reverse rotation if power supply is not properly connected.

Galvanized 20 Gauge Zinc Coated Steel Cabinet:

Cleaned, rinsed, sealed and dried before the polyurethane primer is applied. The cabinet is handsomely finished with a baked on textured enamel, which allows it to withstand 1000 hours of salt spray tests per ASTM B117-03.

Foil Faced Insulation:

Standard on all units.

Full Length Mounting Brackets:

Built into cabinet for improved appearance and easy installation. NOTE: Bottom mounting bracket included to assist in installation.

Electrical Components:

Are easily accessible for routine inspection and maintenance through a right side, service panel opening. Features a lockable, hinged access cover to the circuit breaker or toggle disconnect switch.

Electric Heat Strips:

Features an automatic limit and thermal cut-off safety control.

Filter Service Door:

Separate service door provides easy access for filter change.

One Inch, Disposable Air Filters:

Are standard equipment. Optional one inch washable filters available and filter racks permit the addition of 2" pleated filter. Factory or field installed.

Condenser Fan and Motor Shroud Assembly:

Slides out for easy access.

Barometric Fresh Air Damper:

Standard on all units. Allows up to 25% outside fresh air. Optional ventilation packages available.

Built-in Circuit Breakers:

Standard on all electric heat versions of single (230/208 volt) and three phase (230/208 volt) equipment. Toggle disconnects are standard on all electric heat versions of three phase (460 volt) equipment.

Slope Top:

Standard feature for water run-off.

Top Rain Flashing:

Standard feature on all models.

Liquid Line Filter Drier:



Standard on all units. Protects system against moisture.

Compressor Control Module:

Standard on all units. Built-in off-delay timer adjustable from 30 seconds to 5 minutes. 2-minute on-delay if power interrupt. 120-second bypass for low pressure control, and both soft and manual lockouts for high and low pressure controls. Alarm output for alarm relay.

High & Low Pressure Switches are Auto-Reset:

Standard on all units. Built-in lockout circuit resets from the room thermostat. Provides commercial quality protection to the compressor.



Capacity and Efficiency Ratings

MODELS	W24A2 W24L2	W30A2	W36A2 W36L2	W42A2 W42L2	W48A2 W48L2	W60A2 W60L2	W70A2 W70L2
Cooling Capacity Btuh	21,600	26,800	32,000	36,800	45,000	50,000	62,000
Cooling Capacity KW	6.33	7.85	9.38	10.78	13.18	14.65	18.16
EER	9.0	9.0	9.0	9.5	9.0	9.0	9.0

All capacity, efficiency and cost of operation information is based on high speed operation with fresh air cover plate. Cover plate must be ordered separately and is recommended for use to obtain maximum energy efficiency where fresh air is not required.

Specifications 21,200 Btuh (6.21 KW) — 31,200 Btuh (9.14 KW)

MODELS	W24A2-D	W24A2-F W24L2-F	W30A2-D	W30A2-F	W36A2-D	W36A2-E	W36A2-F W36L2-F
Electrical Rating-50 Hz	240/220 - 1	415/380 - 3⓪	240/220 - 1	415/380 - 3⓪	240/220 - 1	220/200 - 3	415/380 - 3⓪
Operating Voltage Range	198-254	342-456	198-254	342-456	198-254	180-242	342-456
Compressor--Circuit A							
Voltage	240/220	415/380	240/220	415/380	240/220	220/200	415/380
Rated Load Amps	8.2/9.5	3.8/4.5	10.6/12.0	4.6/5.2	13.7/15.4	11.3/12.7	5.1/5.8
Branch Circuit Selection Current	10.9	5.1	12.2	5.3	16.0	13.2	6.0
Lock Rotor Amps	60/60	28/28	67/67	38/38	87/87	95/95	46/46
Compressor Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Fan Motor & Condenser							
Fan Motor--HP--RPM	1/5 - 1090	1/5 - 1090	1/5 - 1075	1/5 - 1075	1/5 - 1075	1/5 - 1075	1/5 - 1075
Fan Motor--Amps	1.2	1.2	1.5	1.5	1.5	1.5	1.5
Fan--DIA. m ³ /s	458/0.66	458/0.66	508/0.86	508/0.86	508/0.78	508/0.78	508/0.78
Blower Motor & Evaporator							
Blower Motor--HP--RPM--SPD	1/6-1100-1	1/6-1100-1	1/3-1100-2	1/3-1100-2	1/3-1100-2	1/3-1100-2	1/3-1100-2
Blower Motor--Amps	0.8	0.8	2.1	2.1	2.1	2.1	2.1
m ³ /s Cooling & E.S.P. (pa) w/Filter (Rated-Wet Coil)	0.32/75	0.32/75	0.39/75	0.39/75	0.43/50	0.43/50	0.43/50
Filter Sizes (mm) STD.	405x635x25	405x635x25	405x765x25	405x765x25	405x765x25	405x765x25	405x765x25
Shipping Weight -- Lbs. (Kg)	335 (152)	335 (152)	375 (170)	375 (170)	375 (170)	375 (170)	375 (170)

Specifications 36,000 Btuh (10.54 KW) — 59,000 Btuh (17.28 KW)

MODELS	W42A2-E	W42A2-F W42L2-F	W48A2-E	W48A2-F W48L2-F	W60A2-E	W60A2-F W60L2-F	W70A2-F W70L2-F
Electrical Rating--50 Hz	220/200-3	415/380-3 ⓪	220/200-3	415/380-3 ⓪	220/200-3	415/380-3 ⓪	415/380-3 ⓪
Operating Voltage Range	180-242	342-456	180-242	342-456	180-242	342-456	342-440
Compressor--Circuit A							
Voltage	220/200	415/380	220/200	415/380	220/200	415/380	415/380
Rated Load Amps	10.1/11.3	4.8/5.4	12.6/14.2	5.7/6.4	13/14.8	6.5/7.4	8.3/9.1
Branch Circuit Selection Current	12.6	16.0	15.0	6.8	15.6	7.8	10.6
Lock Rotor Amps	80.7/80.7	43/43	110/110	51.5/51.5	110/110	51.5/51.5	74/74
Compressor Type	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll	Scroll
Fan Motor & Condenser							
Fan Motor--HP--RPM	1/3-825	1/3-825	1/3-825	1/3-825	1/3-825	1/3-825	1/3-950
Fan Motor--Amps	2.5	2.5	2.5	2.5	2.5	2.5	4.0
Fan--DIA. m ³ /s	610/1.05	610/1.05	610/1.05	610/1.05	610/0.98	610/0.98	610/1.37
Blower Motor & Evaporator							
Blower Motor--HP--RPM--SPD	1/3-985-2	1/3-985-2	1/3-985-2	1/3-985-2	1/2-1070-2	1/2-1070-2	1/2-1070-2
Blower Motor--Amps	2.3	2.3	2.3	2.3	3.5	3.5	3.5
m ³ /s Cooling & E.S.P. (pa) w/Filter (Rated-Wet Coil)	0.55/112	0.55/112	0.60/75	0.60/75	0.66/100	0.66/100	0.66/50
Filter Sizes (mm) STD.	508x765x25	508x765x25	508x765x25	508x765x25	508x765x25	508x765x25	508x765x25
Shipping Weight -- Lbs. (Kg)	525 (238)	525 (238)	525 (238)	525 (238)	525 (238)	525 (238)	525 (238)

⓪ 415/380-3 electrical ratings are 3-phase wye (star) systems requiring three (3) phase legs plus neutral and ground.

NOTE: The indoor & outdoor motors, and 24V transformer primary are connected at 240V derived from one (1) phase leg to neutral. This is internally connected and no field wiring required.

Ventilation System Packages

Bard Wall-Mounts are designed to provide optional ventilation packages to meet all of your ventilation and indoor air quality requirements. Standard on all units is the barometric fresh air damper. All packages can be ordered built-in at the factory or can be easily field-installed at the time of installation of the Wall-Mount, or can be retrofitted at a later date.



BAROMETRIC FRESH AIR DAMPER

BAROMETRIC FRESH AIR DAMPER - BFAD


STANDARD

The barometric fresh air damper is a standard feature on all models. It is installed on the inside of the service door and allows outside ventilation air, up to 25% of the total airflow rating of the unit, to be introduced through the air inlet openings and to be mixed with the conditioned air. The damper opens during blower operation and closes when the blower is off. Adjustable blade stops allow different amounts of outside air to be introduced into the building and can be easily locked closed if required.

BLANK OFF PLATE - BOP

OPTIONAL

A blank off plate is installed on the inside of the service door. It covers the air inlet openings, which restricts any outside air from entering the unit. The blank off plate should be utilized in applications where outside air is not required to be mixed with the conditioned air.



MOTORIZED FRESH AIR DAMPER

MOTORIZED FRESH AIR DAMPER - MFAD

OPTIONAL

The motorized fresh air damper is internally mounted behind the service door and allows outside ventilation air, up to 25% of the total airflow rating of the unit, to be introduced through the air inlet openings and to be mixed with the conditioned air. The two position damper can be fully open or closed. The damper blade is powered open by a 24VAC motor with spring return on power loss. The damper can be controlled by indoor blower operation or can be field connected to be managed based on building occupancy.

NOTE: The above vent systems are intake only without built-in exhaust capability. Building will likely require separate field installed barometric relief or mechanical exhaust elsewhere within the conditioned space. Balancing dampers in the return air grille may be required to achieve specified amount of outdoor air intake.



COMMERCIAL ROOM VENTILATOR

COMMERCIAL ROOM VENTILATOR - CRV

OPTIONAL

The built-in commercial room ventilator is internally mounted behind the service door and allows outside ventilation air, up to 50% of the total airflow rating of the unit, to be introduced through the air inlet openings. It includes a built-in exhaust air damper.

The commercial room ventilator (CRV) is a simple and innovative approach to improving the indoor air quality by providing fresh air intake and exhaust capability through the CRV. The damper can be easily adjusted to control the amount of fresh air supplied into the building. The CRV can be controlled by indoor blower operation or field controlled based on room occupancy. The CRV is power open - spring return on power loss. Complies with ASHRAE Standard 62.1 "Ventilation for Acceptable Indoor Air Quality."

ECONOMIZER - ECONWM-Series

OPTIONAL

The built-in economizer system is internally mounted behind the service door and allows outdoor air to be introduced through the air inlet openings. The amount of outdoor air varies in response to the system controls and settings defined by the end user. It includes a built-in exhaust air damper. The economizer is designed to provide "free cooling" when outside air conditions are cool and dry enough to satisfy cooling requirements without running the compressor. This in turn provides lower operating costs, while extending the life of the compressor.

- ECONWMT Equipment Building versions have extended 11" air intake hood to deliver up to 100% of cooling rated airflow.

Standard Features:

- Fully modulating
- Honeywell Direct Drive Hi-Torque Actuator
- No linkage required
- Simple single blade design
- Positive shut-off with non-stick gaskets
- Electronic DB and/or Enthalpy sensors depending upon version
- Honeywell JADE electronic economizer module with precision settings and diagnostics
- DB or Enthalpy economizer versions available



Economizer

**Clearances - Inches (mm)
Required for Service Access and
Adequate Condenser Airflow**

MODELS	LEFT SIDE	RIGHT SIDE
W24A, W30A, W36A W24L, W36L	15 (380)	20 (510)
W42A, W48A, W60A, W70A W42L, W48L, W60L, W70L	20 (510)	20 (510)

**Minimum Clearances - Inches (mm)
Required to Combustible Materials**


MODELS ①	SUPPLY AIR DUCT	
	FIRST 3 FEET (1m)	CABINET
W24A, W24L	0	0
W30A, W36A, W36L	.25 (6.35)	0
W42A, W48A, W60A, W70A W42L, W48L, W60L, W70L	.25 (6.35)	0

① Refer to the installation manual for more detailed information.

Dimensions of Basic Unit for Architectural and Installation Requirements - Inches (mm)

MODEL	WIDTH (W)	DEPTH (D)	HEIGHT (H)	SUPPLY			RETURN															
				A	B	C	B	E	F	G	I	J	K	L	M	N	O	P	Q	R	S	T
W24A, W24L	33.300 (845)	17.125 (435)	70.563 (1792)	7.88 (200)	19.88 (505)	11.88 (302)	19.88 (505)	35.00 (889)	10.88 (276)	25.75 (654)	20.56 (522)	26.75 (680)	28.06 (713)	29.25 (743)	27.00 (686)	2.63 (67)	34.13 (867)	22.06 (560)	10.55 (268)	4.19 (106)	12.00 (305)	5.00 (127)
W30A W36A, W36L	38.200 (970)	17.125 (435)	70.563 (1792)	7.88 (200)	27.88 (708)	13.88 (353)	27.88 (708)	40.00 (1016)	10.88 (276)	25.75 (654)	17.93 (455)	26.75 (680)	28.75 (730)	29.25 (743)	27.00 (686)	2.75 (70)	39.19 (996)	22.75 (578)	9.14 (232)	4.19 (106)	12.00 (305)	5.00 (127)
W42A, W42L W48A, W48L W60A, W60L W70A, W70L	42.075 (1069)	22.432 (570)	84.875 (2156)	9.88 (251)	29.88 (759)	15.88 (403)	29.88 (759)	43.88 (1115)	13.56 (344)	31.66 (804)	30.00 (762)	32.68 (830)	26.94 (684)	34.69 (881)	32.43 (824)	3.37 (86)	42.88 (1089)	23.88 (607)	10.00 (254)	2.00 (51)	16.00 (406)	1.88 (48)


W24 - 70A Models

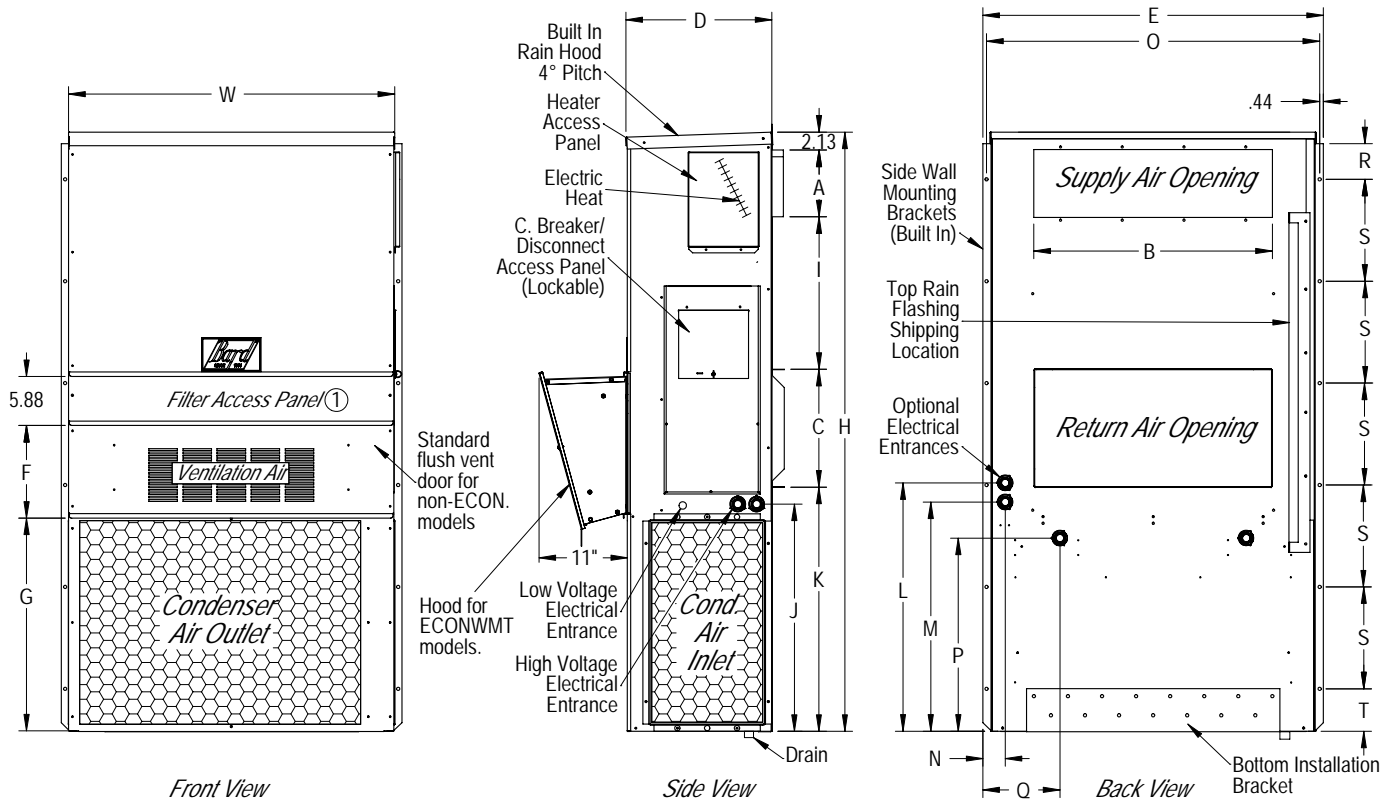

MIS-3282

① Not used when ECONWMT Economizers installed. Filter access is through the ECONWMT hood.

W24 - 70L Models

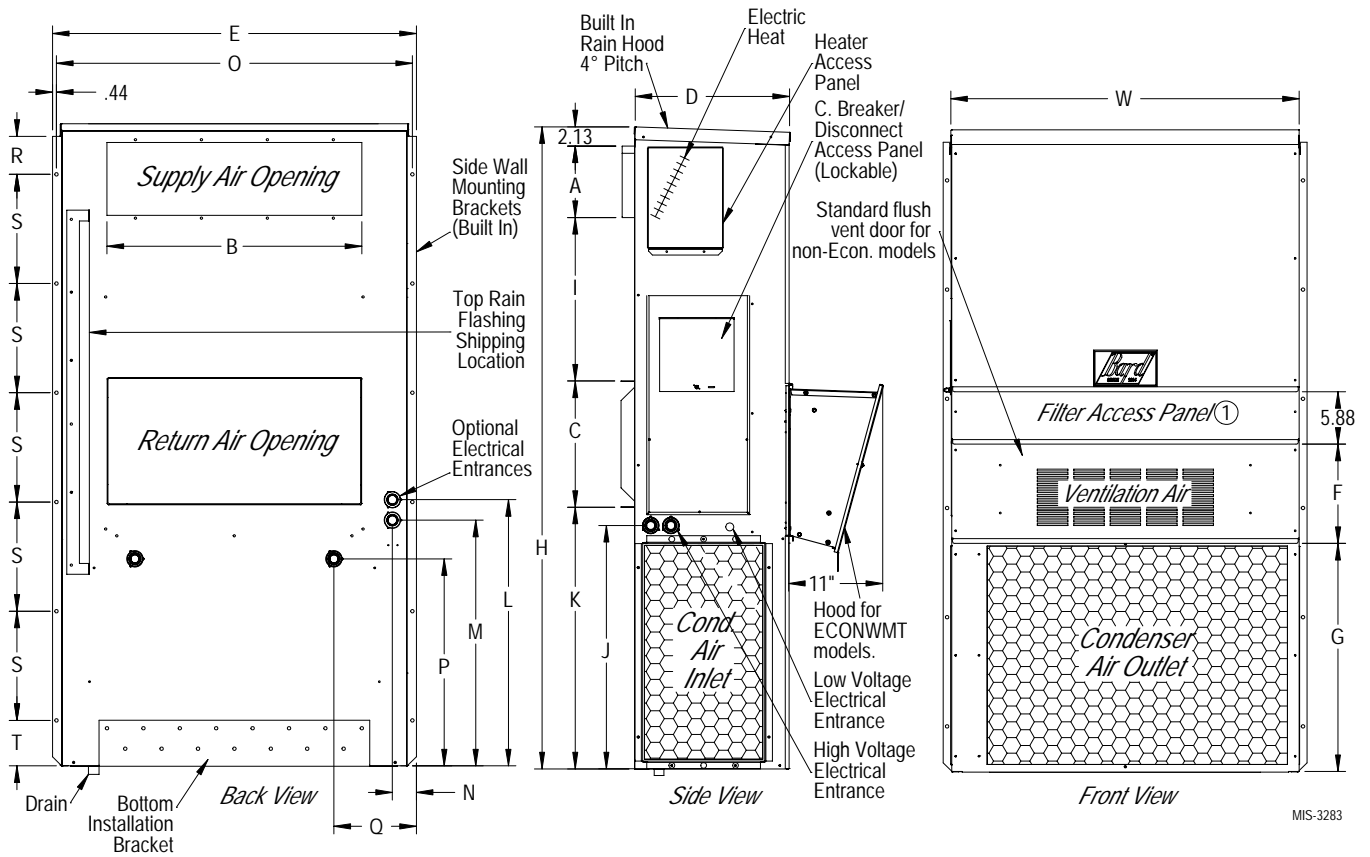

MIS-3283

① Not used when ECONWMT Economizers installed. Filter access is through the ECONWMT hood.

Electrical Specifications

Model	Rated Volts and Phase	Operating Voltage Range	No. Field Power Circuits	② Minimum Circuit Amps	① Maximum External Fuse or Circuit Breaker
W24A2 - D0Z D05 D08	240/220-1	198-254	1 1 1	16 28 44	20 30 45
W24A2 - F0Z W24L2 F05	415/380-3 ③	342-456	1 1	9 11	15 15
W30A2 - D0Z D05 D10	240/220-1	198-254	1 1 1	19 29 55	35 35 60
W30A2 - F0Z F07 F12	415/380-3 ③	342-456	1 1 1	11 17 20	15 20 30
W36A2 - D0Z D05 D10	240/220-1	198-254	1 1 1	23 29 55	35 35 60
W36A2 - E0Z E06 E12	220/200-3	180-242	1 1 1	21 21 39	30 30 40
W36A2 - F0Z W36L2 F07 F12	415/380-3 ③	342-456	1 1 1	11 16 26	15 20 30
W42A2 - E0Z E09 E15	220/200-3	180-242	1 1 1	21 30 49	35 35 60
W42A2 - F0Z W42L2 F07 F14	415/380-3 ③	342-456	1 1 1	13 17 30	20 20 35
W48A2 - E0Z E09 E15	220/200-3	180-242	1 1 1	24 30 49	35 35 50
W48A2 - F0Z W48L2 F07 F14	415/380-3 ③	342-456	1 1 1	14 17 31	20 20 35
W60A2 - E0Z E09 E15	220/200-3	180-242	1 1 1	28 34 53	40 40 60
W60A2 - F0Z W60L2 F07 F14	415/380-3 ③	342-456	1 1 1	16 18 32	20 20 35
W70A2 - F0Z W70L2 F07 F14	415/380-3 ③	342/440	1 1 1	21 21 32	30 30 35

① Maximum size of the time delay fuse or "D" rated circuit breaker for protection of field wiring conductors.

② These "Minimum Circuit Amps" values are to be used for sizing the field power conductors.

③ 415/380-3 electrical ratings are 3-phase wye (star) systems requiring three (3) phase legs plus neutral and ground. **NOTE:** The indoor and outdoor motors and 24V transformer primary are connected at 240V derived from one (1) phase leg to neutral. This is internally connected and no field wiring required.

NOTE: All wiring must conform to NIC/EIC latest edition.

IMPORTANT: While this electrical data is presented as a guide, it is important to electrically connect properly sized fuses & conductor wires in accordance with the National Electrical Code & all local codes.

Electric Heat Table - Refer to Electrical Specifications for Availability by Unit Model

Model	W24A2-D		W24A2-F W24L2-F		W30A2-D W36A2-D		W36A2-E		W30A2-F W36A2-F W36L2-F		W42A2-E W48A2-E W60A2-E		W42A2-F, W42L2-F W48A2-F, W48L2-F W60A2-F, W60L2-F W70A2-F, W70L2-F	
① KW	240V-1 WATTS	220V-1 WATTS	415V-3 WATTS	380V-3 WATTS	240V-1 WATTS	220V-1 WATTS	220V-3 WATTS	200V-3 WATTS	415V-3 WATTS	380V-3 WATTS	220V-3 WATTS	200V-3 WATTS	415V-3 WATTS	380V-3 WATTS
5.0	5000	4201			5000	4201								
8.0	8000	6722												
10.0					10000	8403								
6.0							5042	4167						
7.0									6728	5641			6728	5641
9.0											7562	6250		
12.0							10083	8333	11213	9401				
14.0														
15.0											12604	10417		

① Nominal Heater KW based on unit model number.

Cooling Application Data - Outdoor Temperature ① Btuh (KW)

Model	DB/WB②	Cooling Capacity	OUTDOOR TEMPERATURE ②					
			75°F (23.9°C)	85°F (29.4°C)	95°F (35.0°C)	105°F (40.6°C)	115°F (46.1°C)	125°F (51.7°C)
W24A W24L	75/62°F (23.9/16.7°C)	Total Sensible	22,600 (6.62) 18,100 (5.30)	20,800 (6.09) 17,200 (5.04)	19,000 (5.56) 16,300 (4.77)	17,200 (5.04) 15,400 (4.51)	15,200 (4.45) 14,500 (4.25)	13,300 (3.90) 13,600 (3.98)
	80/67°F (26.7/19.4°C)	Total Sensible	24,100 (7.06) 17,500 (5.13)	23,100 (6.77) 17,900 (4.98)	21,600 (6.33) 16,400 (4.80)	20,200 (5.92) 15,800 (4.63)	18,300 (5.36) 15,100 (4.42)	16,200 (4.74) 14,200 (4.16)
W30A	75/62°F (23.9/16.7°C)	Total Sensible	27,900 (8.17) 21,400 (6.27)	25,600 (7.50) 21,200 (6.21)	23,300 (6.82) 20,300 (5.95)	21,300 (6.24) 19,300 (5.65)	19,200 (5.62) 17,800 (5.21)	17,000 (4.98) 16,000 (4.69)
	80/67°F (26.7/19.4°C)	Total Sensible	29,700 (8.70) 20,800 (6.09)	28,400 (8.32) 20,900 (6.12)	26,800 (7.85) 20,500 (6.00)	25,000 (7.32) 19,700 (5.77)	23,000 (6.74) 18,500 (5.42)	20,600 (6.03) 16,800 (4.92)
W36A W36L	75/62°F (23.9/16.7°C)	Total Sensible	33,600 (9.84) 25,300 (7.41)	30,800 (9.02) 24,100 (7.06)	28,000 (8.20) 22,900 (6.71)	25,300 (7.41) 21,500 (6.30)	22,800 (6.68) 20,000 (5.86)	20,300 (5.95) 18,400 (5.39)
	80/67°F (26.7/19.4°C)	Total Sensible	35,900 (10.51) 24,400 (7.15)	34,200 (10.02) 23,800 (6.97)	32,000 (9.38) 23,100 (6.77)	29,900 (8.76) 22,100 (6.47)	27,400 (8.02) 20,800 (6.09)	24,700 (7.23) 19,300 (5.65)
W42A W42L	75/62°F (23.9/16.7°C)	Total Sensible	40,100 (11.74) 31,400 (9.20)	35,700 (10.46) 29,800 (8.73)	32,200 (9.43) 28,300 (8.29)	29,300 (8.58) 26,800 (7.85)	27,100 (7.94) 25,100 (7.35)	25,300 (7.41) 23,400 (6.85)
	80/67°F (26.7/19.4°C)	Total Sensible	42,700 (12.51) 30,400 (8.90)	39,600 (11.60) 29,500 (8.64)	36,800 (10.78) 28,500 (8.35)	34,500 (10.10) 27,400 (8.02)	32,500 (9.52) 26,100 (7.64)	30,800 (9.02) 24,600 (7.20)
W48A W48L	75/62°F (23.9/16.7°C)	Total Sensible	47,700 (13.97) 36,200 (10.60)	43,400 (12.71) 34,400 (10.07)	39,300 (11.51) 32,600 (9.55)	35,500 (10.40) 30,600 (8.96)	32,000 (9.37) 28,600 (8.38)	28,500 (8.35) 26,600 (7.79)
	80/67°F (26.7/19.4°C)	Total Sensible	50,900 (14.91) 35,100 (10.28)	48,200 (14.12) 34,100 (9.99)	45,000 (13.18) 32,900 (9.64)	41,900 (12.27) 31,400 (9.20)	38,500 (11.28) 29,800 (8.73)	34,700 (10.16) 28,000 (8.20)
W60A W60L	75/62°F (23.9/16.7°C)	Total Sensible	52,700 (15.43) 40,300 (11.80)	48,100 (14.09) 38,200 (11.19)	43,600 (12.77) 36,100 (10.57)	39,500 (11.57) 34,100 (9.99)	35,600 (10.43) 32,300 (9.46)	31,800 (9.31) 30,400 (8.90)
	80/67°F (26.7/19.4°C)	Total Sensible	56,300 (16.49) 39,100 (11.45)	53,400 (15.64) 37,800 (11.07)	50,000 (14.65) 36,400 (10.66)	46,600 (13.65) 35,000 (10.25)	42,800 (12.54) 33,500 (9.81)	38,700 (11.33) 31,900 (9.34)
W70A W70L	75/62°F (23.9/16.7°C)	Total Sensible	66,200 (19.39) 46,800 (13.71)	59,700 (17.48) 44,300 (12.97)	53,900 (15.79) 41,800 (12.24)	48,900 (14.32) 39,400 (11.54)	44,500 (13.03) 36,900 (10.81)	40,600 (11.89) 34,500 (10.10)
	80/67°F (26.7/19.4°C)	Total Sensible	70,700 (20.71) 45,400 (13.30)	66,300 (19.42) 43,800 (12.83)	62,000 (18.16) 42,200 (12.36)	57,700 (16.90) 40,400 (11.83)	53,600 (15.70) 38,400 (11.25)	49,600 (14.53) 36,400 (10.66)

① Below 65°F (18.3C), unit requires a factory or field installed low ambient control.

② Return air temperature.


Indoor Blower Performance - CFM (m³/s) at 220 Volts

Speed	W24	W30		W36		W42 / W48		W60		W70	
	Single	High	Low	High	Low	High	Low	High	Low	High	Low
ESP Inch H ₂ O (Pa)	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil	Dry/Wet Coil
.00 (0)	820 / 805 (0.39 / 0.38)	1135 / 1065 (0.54 / 0.50)	755 / 735 (0.36 / 0.35)	1175 / 1060 (0.55 / 0.50)	795 / 770 (0.38 / 0.36)	1535 / 1495 (0.72 / 0.71)	1330 / 1290 (0.63 / 0.61)	1725 / 1670 (0.81 / 0.79)	1250 / 1210 (0.59 / 0.57)	1700 / 1530 (0.80 / 0.72)	1235 / 1160 (0.58 / 0.55)
.10 (25)	785 / 770 (0.37 / 0.36)	1085 / 1015 (0.51 / 0.48)	735 / 715 (0.35 / 0.34)	1120 / 1010 (0.53 / 0.48)	785 / 760 (0.37 / 0.36)	1475 / 1430 (0.70 / 0.67)	1280 / 1245 (0.60 / 0.59)	1675 / 1625 (0.79 / 0.77)	1205 / 1165 (0.57 / 0.55)	1635 / 1470 (0.77 / 0.69)	1185 / 1110 (0.56 / 0.52)
.20 (50)	740 / 720 (0.35 / 0.34)	1015 / 940 (0.48 / 0.44)	705 / 675 (0.33 / 0.32)	1050 / 935 (0.50 / 0.44)	770 / 745 (0.36 / 0.35)	1400 / 1360 (0.66 / 0.64)	1210 / 1175 (0.57 / 0.55)	1600 / 1550 (0.76 / 0.73)	1160 / 1125 (0.55 / 0.53)	1580 / 1410 (0.75 / 0.67)	1140 / 1075 (0.54 / 0.51)
.30 (75)	680 / 665 (0.32 / 0.31)	925 / 845 (0.44 / 0.40)	655 / 625 (0.31 / 0.29)	990 / 880 (0.47 / 0.42)	725 / 705 (0.34 / 0.33)	1320 / 1285 (0.62 / 0.61)	1155 / 1115 (0.55 / 0.53)	1550 / 1505 (0.73 / 0.71)	1110 / 1080 (0.52 / 0.51)	1520 / 1365 (0.72 / 0.64)	1015 / 955 (0.48 / 0.45)
.40 (100)	610 / 600 (0.29 / 0.28)	835 / 755 (0.39 / 0.36)	575 / 550 (0.27 / 0.26)	900 / 810 (0.42 / 0.38)	645 / 625 (0.30 / 0.29)	1240 / 1210 (0.59 / 0.57)	1085 / 1055 (0.51 / 0.50)	1455 / 1415 (0.69 / 0.67)	1015 / 985 (0.48 / 0.46)	1430 / 1285 (0.67 / 0.61)	945 / 890 (0.45 / 0.42)
.5 (125)	500 / 490 (0.24 / 0.23)	720 / 645 (0.34 / 0.30)	490 / 465 (0.23 / 0.22)	805 / 720 (0.38 / 0.34)	530 / 510 (0.25 / 0.24)	1160 / 1135 (0.55 / 0.54)	1015 / 985 (0.48 / 0.46)	1380 / 1335 (0.65 / 0.63)	935 / 900 (0.44 / 0.42)	1245 / 1120 (0.59 / 0.53)	870 / 820 (0.41 / 0.39)

Above data is with 1" (25mm) standard disposable filter and 1" (25mm) washable filter.
For optional 2" (51mm) pleated filter - reduce ESP by .15" (37.33Pa).
See installation instructions for maximum ESP information on various KW application.

Speeds marked "**bold**" above are **Factory Connected**.

Air Conditioning Wall-Mount Model Nomenclature

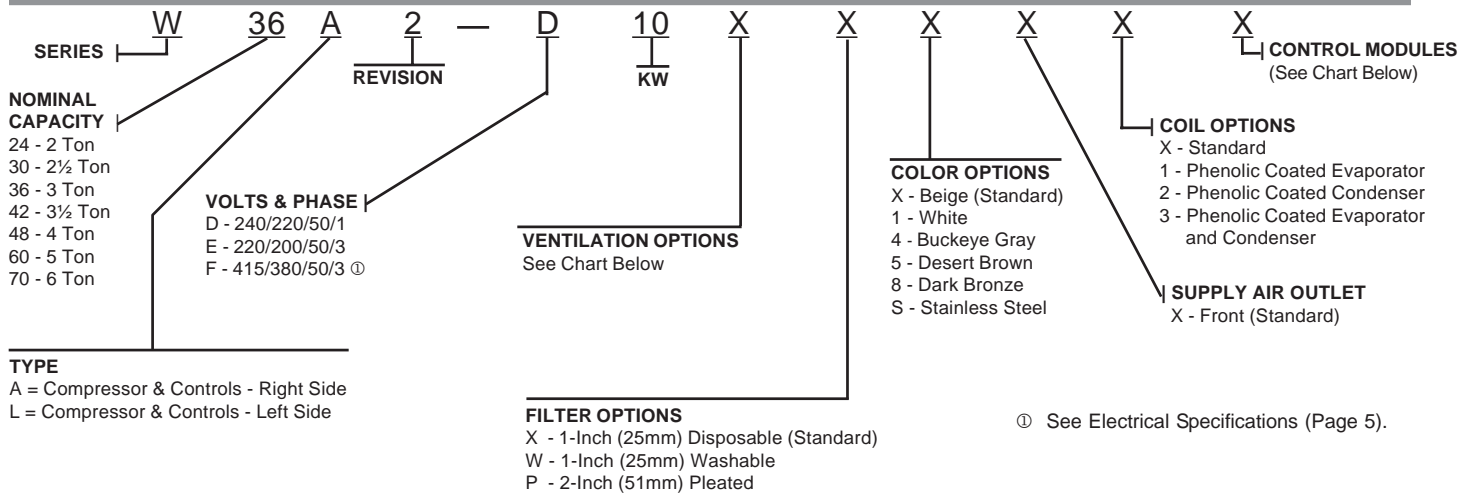

Ventilation Options

Models	W24A2 W24L2		W30A2 W36A2, W36L2		W42A2, W48A2, W60A2, W70A2 W42L2, W48L2, W60L2, W70L2	
	Factory Installed Code No.	Field Installed Part No.	Factory Installed Code No.	Field Installed Part No.	Factory Installed Code No.	Field Installed Part No.
Barometric Fresh Air Damper	X	BFAD-2	X	BFAD-3	X	BFAD-5
Blank-Off Plate	B	BOP-2	B	BOP-3	B	BOP-5
Motorized Fresh Air Damper	M	MFAD-2	M	MFAD-3	M	MFAD-5
Commercial Ventilator - Motorized	V	CRV-2	V	CRVS-3	V	CRVS-5
Economizer - Equipment Bldg. - Enthalpy ②	W	ECONWMT-E2B ①	W	ECONWMT-E3B ①	W	ECONWMT-E5B ①
Economizer - Equipment Bldg. - DB Temp ②	T	ECONWMT-T2B ①	T	ECONWMT-T3B ①	T	ECONWMT-T5B ①

- ① Insert color to match unit ("X" = Beige; "4" = Buckeye Gray; etc.)
 ② Full Flow (100% of Rated Cooling CFM). All ECONWMT versions have 11" deep intake hood.

Air Conditioning Control Modules

Air Conditioning Control Modules								All Models Except As Noted	
HPC ①	LPC ②	CCM ③	LAC ④	ALR ⑤	SK ⑥	SK ⑦	DDC ⑧	Factory Installed Code	Field Installed Part
STD	STD	STD						X	N/A
STD	STD	STD	●					E	CMA-28
STD	STD	STD	●	●				J	Factory Only
STD	STD	STD	●		●			K	CMC-15 and CMA-28
STD	STD	STD	●	●	●			M	Factory Only
STD	STD	STD			●			Field Installed Only	CMC-15
STD	STD	STD	●	●			●	V ⑨	Factory Only
STD	STD	STD					●	Field Installed Only	CMA-23 for W18-36A CMA-24 for W42-70A
STD	STD	STD				●		Field Installed Only	SK111

- STD = Standard equipment all models.
- ① HPC. High pressure control is auto reset. Always used with compressor control module (CCM) which is included. See note ③.
- ② LPC. Low pressure control is auto reset. Always used with compressor control module (CCM) which is included. See note ③.
- ③ CCM. Compressor control module has adjustable 30-second to 5-minute delay-on-break timer. On initial power-up, or any time the power is interrupted, the delay-on-make will be 2 minutes plus 10% of the delay-on-break setting. There is no delay-on-make during routine operation of the unit. The module also provides the lockout feature (with 1 retry) for high and/or low-pressure controls, and a 2-minute timed bypass for low-pressure control.
- ④ LAC. Low ambient control permits cooling operation down to 0°F (-17.7°C)
- ⑤ ALR. The alarm relay has a set of normally open and normally closed dry contacts to provide the ability to signal a condition of shutdown on either high or low pressure controls.
- ⑥ SK. PTCR start kit can be used with all -D single phase models. Increases starting torque 2-3x. Not used for -E or -F three phase models. Do not use if SK111 is used.
- ⑦ SK. Start capacitor and potential relay start kit can be used with all -D single phase models. Increases starting torque 9x. Not used for -E, -F or -P three phase models. Do not use if CMC-15 is used.
- ⑧ DDC. Incorporates 4 additional sensors: discharge air temperature, indoor blower airflow, compressor current, and dirty filter. These sensing devices function to input analog data such as temperature, as well as digital data such as airflow, compressor status or filter status.
- ⑨ "V" control module should be ordered in conjunction with direct digital controller (DDC) model TCS24. Refer to DDC specification sheet S3280 for more information.



Bard Manufacturing Company, Inc.
 Bryan, Ohio 43506
 www.bardhvac.com

Since 1914... Moving ahead, just as planned.

Due to our continuous product improvement policy, all specifications subject to change without notice.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.

Form No.
 S3408
 September, 2013

Supersedes: S3408-513