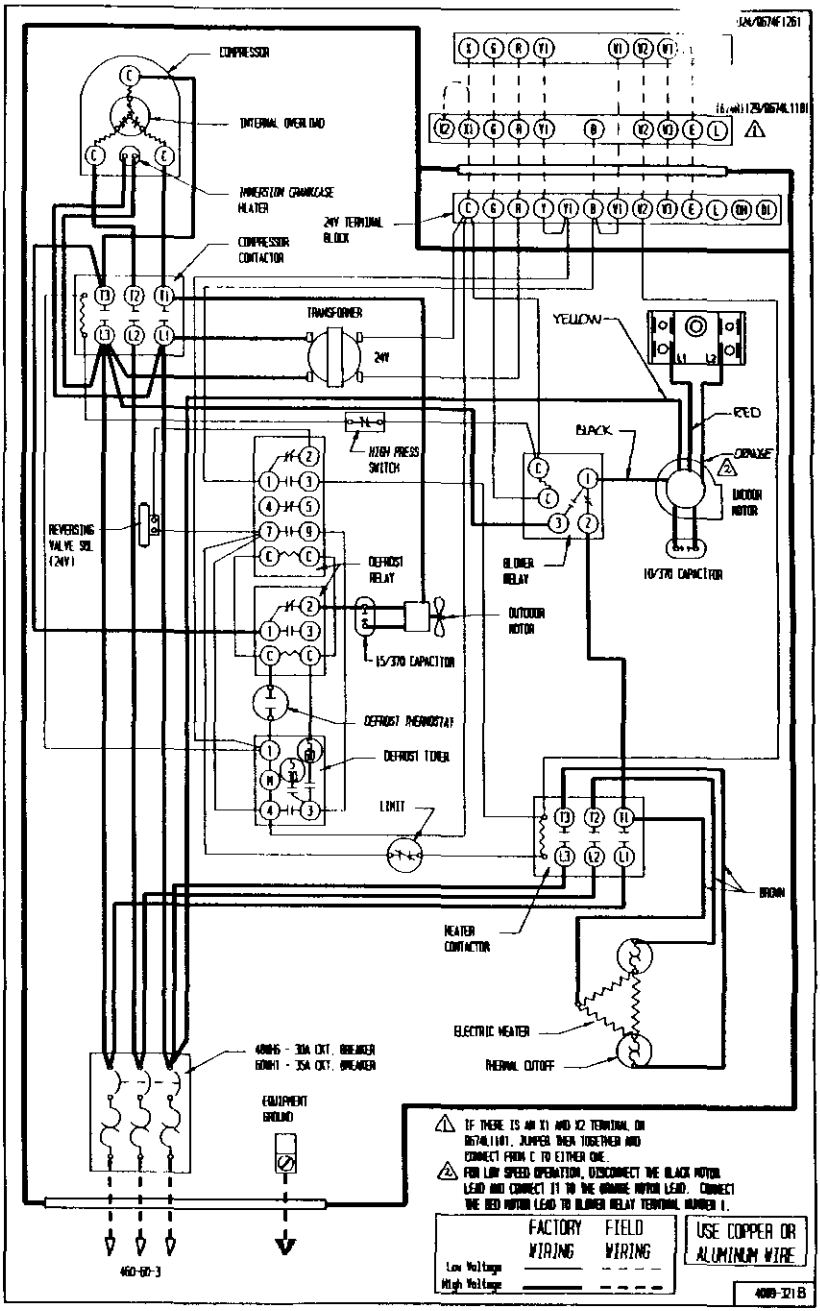
COMPRESSOR
INTERNAL OVERLOAD
IMMERSION CRANKCASE HEATER
COMPRESSOR CONTACTOR
24V TERMINAL BLOCK
TRANSFORMER
24V
HIGH PRESS SWITCH
REVERSING VALVE SOL (24V)
DEFROST RELAY
OUTDOOR MOTOR
15/370 CAPACITOR
DEFROST THERMOSTAT
DEFROST TIMER
LIMIT
YELLOW
BLACK
RED
ORANGE
INDOOR MOTOR
BLOWER RELAY
10/370 CAPACITOR
BROWN
HEATER CONTACTOR
ELECTRIC HEATER
THERMAL CUTOFF
40AMS - 30A CKT. BREAKER
60AMS - 35A CKT. BREAKER
EQUIPMENT GROUND
460-60-3
IF THERE IS AN X1 AND X2 TERMINAL ON 0674L1101, JUMPER THEM TOGETHER AND CONNECT FROM C TO EITHER ONE.
FOR LOW SPEED OPERATION, DISCONNECT THE BLACK MOTOR LEAD AND CONNECT IT TO THE ORANGE MOTOR LEAD. CONNECT THE RED MOTOR LEAD TO BLOWER RELAY TERMINAL NUMBER 1.
FACTORY WIRING
FIELD WIRING
Low Voltage
High Voltage
USE COPPER OR ALUMINUM WIRE
4089-321B